


SHINTO F3F

setup 10/2017

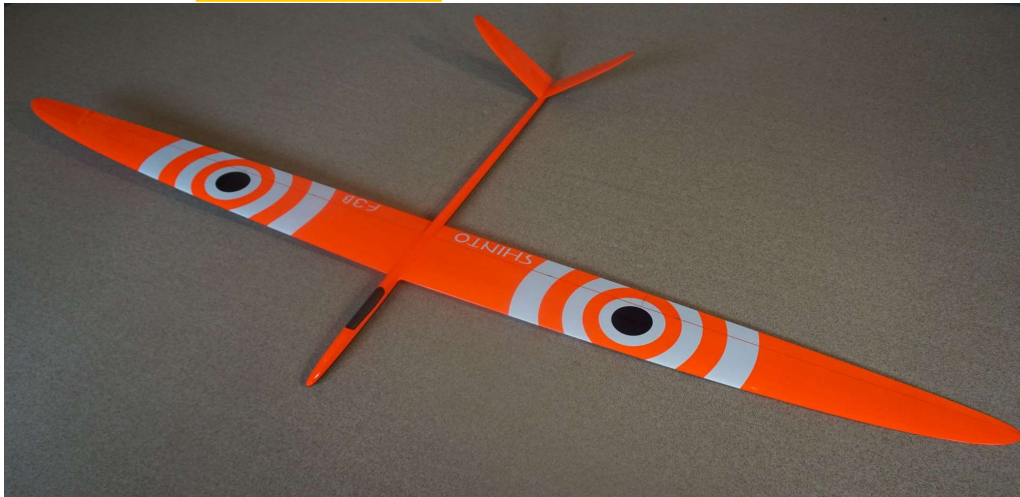

		sp		normal	thermal	speed 1	speed2
aileron up	QR oben			15	14	17	17
aileron down	QR unten			8	4	6	7
aileron-flap mix u	Zumischung WK o			7	0	0	8
aileron-flap mix d	Zumischung WK u			2	4	6	4
elevator up	HLW hoch			7	6	8	8
elevator down	HLW tief			7	6	10	10
rudder	SR			8	9	9	9
rudder	SR			8	9	9	9
ail-rudd-mix	combi-switch			0	0	0	0
camber settings	Wölbung			0	1-2mm	0	0/-1mm
elevator trim	HLW-trimmung			0	0%	0%	-1%
snap-flap	snap-flap			3	2	6	10
C of G	Schwerpunkt	90-98					
(+) = up	nach oben						
(-) = down	nach unten						

Butterfly		
15	aileron up	QR oben
46	flaps down	WK unten
5	elevator down	Tiefenrudder





Speed
17
9
0
7
9
9
9
9
0
0/-1mm
-1%
2

