


T-Race 29

setup 11/2020



		sp	normal	thermal	speed 1
aileron up	QR oben		18	15	17
aileron down	QR unten		6	5	7
aileron-flap mix u	Zumischung WK o		5	0	6
aileron-flap mix d	Zumischung WK u		0	0	0
elevator up	HLW hoch		7	6	6
elevator down	HLW tief		8	7	7
rudder	SR		20	20	20
rudder	SR		20	20	20
ail-rudd-mix	combi-switch		10%	15%	0
camber settings	Wölbung		0	2-3mm	1mm
elevator trim	HLW-trimmung		0	0%	0%
snap-flap	snap-flap		4	2	3
C of G	Schwerpunkt	93-95			
(+) = up	nach oben		Butterfly		
(-) = down	nach unten		10	aileron up	QR oben
			80°	flaps down	WK unten
			3,5	elevator down	Tiefenrudder

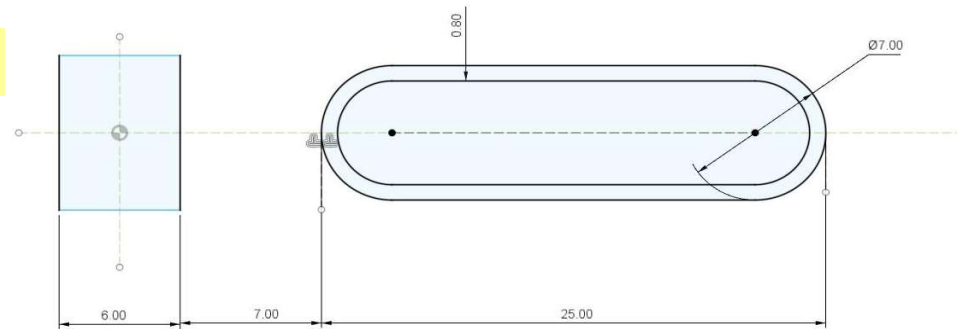

Aussparung für HLW-Kabel/Stecker in Seitenflosse

